



## A Study on Soil-Structure Interaction on Seismic Response of Coupled Steel Plate Shear Wall subjected to Near and Far-Field Earthquakes

E. Yourtchi, M. Gholhaki, O. Rezaifar

Faculty of Civil Engineering, Semnan University, Semnan, Iran.

**ABSTRACT:** Coupled steel plate shear wall (C-SPSW) is a relatively new system that has received less attention from research centers. This system benefits from high ductility and stiffness, which are the two advantages that make this system superior to the other lateral load-resisting systems. This paper aims to study the seismic response of the C-SPSWs under near and far-field earthquakes, resting on soil types II and IV considering soil-structure interaction (SSI) effects using the 5, 10 and 15-storey frames in which the length of link beams and frame bays is equal to 1.25, 2.5 and 3.75 as well as 2.4, 3.2 and 4.8m, respectively. Based on the analysis results, maximum roof displacement of the 5, 10 and 20-storey frames located on stiff soils (soil type II), does not experience remarkable changes under near and far-field earthquakes but, to the contrary, in the case of soil type IV, changes are considerable. Roof acceleration of the structure located on stiff soil, is less than that of the structure on soft soil. In this paper, the ratio of base shear to the effective weight of the structure was taken into account and it was found that incorporation of SSI effects influences the base shear. Moreover, regarding behavioral modes of the coupling beam and coupling degree of the SPSW, the results indicated that this degree has a meaningful correlation with the fundamental period of the structure and the short coupling beams that yield in shear, have a better performance.

### Review History:

Received: Jul. 08, 2020  
Revised: Aug. 09, 2020  
Accepted: Sep. 30, 2020  
Available Online: Oct. 06, 2020

### Keywords:

Coupled Steel Plate Shear Wall (C-SPSW)  
Soil-Structure Interaction (SSI),  
Near-Filed Earthquake  
Far-Field Earthquake  
Degree of coupling.

### 1- Introduction

Steel plate shear walls (SPSWs) have been widely used both in the construction of new buildings and in the strengthening of the existing buildings worldwide, especially in earthquake-prone countries, due to their excellent behavior and benefits. This system benefits from an appropriate stiffness to control deformation and has a ductile failure mechanism and high energy dissipation capacity [1]. In the case of tall buildings, huge forces are developed in the columns, which causes the bending lateral displacements to dominate and drift values prevail in the process of structural design. In order to reduce large displacements, various structural systems such as the coupled steel plate shear wall (C-SPSW) system have been developed. This system consists of a pair of SPSWs that are connected to each other at the level of each floor by a coupling beam [2]. On the other hand, near-fault earthquakes are different from far-fault ground motions. Therefore, it is necessary to study and recognize the characteristics and nature of near-fault records and their impact on structures. In addition to earthquakes, underlying soil can also cause changes in structural responses, especially if the structure is built on a soft stratum. Typically, in the codes and standards, the methods used to analyze the structures assume that the soil under the structure is rigid and the effect of the soil-

structure interaction (SSI) is neglected. Indeed, the soil is not really rigid and its presence changes dynamic properties and responses of the structure. On the other hand, the placement of a relatively rigid foundation of the structure in the soil changes the input excitations arriving at the soil-structure system. Hence, the SSI effects should be considered while designing the structures.

### 2- Numerical Modeling Verification

In order to verify the numerical modeling process, specifications of the SPSW model were selected from the experimental study of two three-story structures conducted by Gholhaki and Sabouri in 2008 [3]. In this experimental study, two three-story structures equipped with SPSW system with scale of 1/3 were tested under cyclic loading. The mentioned walls had two types of beam-column connection, rigid (SPSW-R) and simple (SPSW-S) and for the plates and columns, mild steel (energy-absorbing steel) and high strength steels were used, respectively. Figure 1 shows an overview of the specimen. The modeling process in SAP2000 software is such that first, a model with the specifications of Figure 1 and Table 1 is designed according to Figure 2 and then, the diagonal elements that are used instead of steel shear wall are taken into account. According to AISC provisions, the plastic hinges of the SPSW are assigned and

\*Corresponding author's email: mgholhaki@semnan.ac.ir



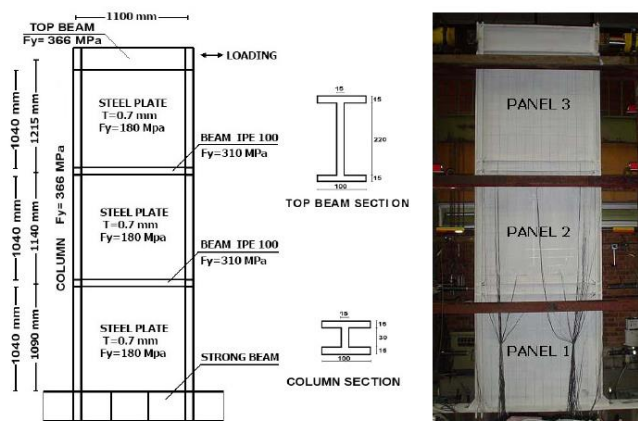


Fig. 1. Section Properties and Dimensions of Numerical Model [3]

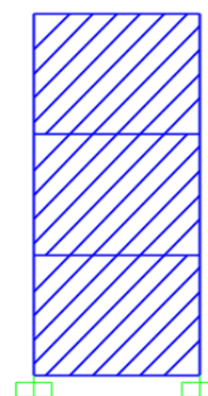


Fig. 2. The model designed in SAP2000

Table 1. Mechanical Properties of Structural Elements in SAP2000 [3]

Section	$F_y$ (N/mm <sup>2</sup> )	E (kN/mm <sup>2</sup> )
Plate	180	206
Column	366	206
Beam	310	206
Top Beam	366	206

finally, the load-displacement curve of the model designed in the software is compared with the experimental results. The beam-column connections are rigid and connection of SPSW to the surrounding beams is pinned.

To validate the models, the rigid connection of the beam to the column has been used and also, nonlinear static analysis (Pushover) has been performed through a displacement control loading protocol using a triangular force distribution pattern. In this method, the applied load is gradually increased until the displacement of the specified point reaches the intended value. After analysis, since in the experimental results, displacement of the first story was used as a basis, displacement of this story along with the base shear was extracted from the software and plotted as a load-displacement curve, and then, this curve was compared with the experimental load-displacement curve extracted from the hysteresis curves. Figure 3 illustrates a comparison between the numerical and experimental load-displacement curves.

### 3- Results

In stiff soils, the roof displacements in the case of fixed base and flexible bases are not different and the SSI can be ignored during design, but for the design of structure resting on soft soils, SSI effects have to be taken into account. Soil-structure interaction is faced a decrease in structural

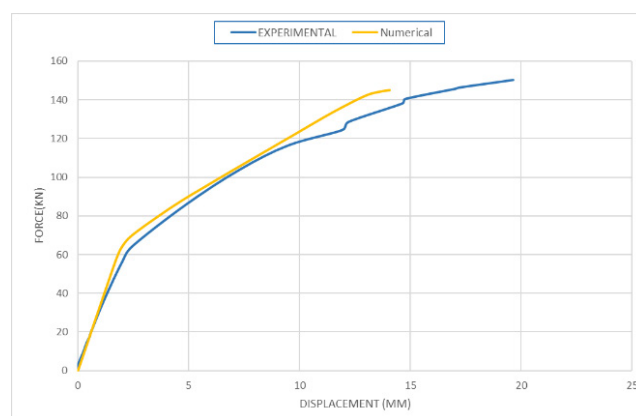


Fig. 3. Comparison between Numerical and Experimental Load-Displacement Curves

acceleration subjected to the average near and far-fault records, compared to a fixed base. In addition, as per the increase in length of the coupling beam (length of SPSW is constant), acceleration of structures increases under the average near and far-fault earthquakes. Changes in the ratio of base shear to the effective weight of the structure of all structures have increased in comparison between the fixed and flexible bases under the earthquakes near the stiff soil sites. As the length of the span length increases, the base shear of the structures decreases. Respectively. Most of the coupling beams are in a shear mode (which is a suitable behavior), indicating the fact that as aimed in the design process, the steel plate has entered into its plastic range of behavior and the other elements remain elastic. Due to the presence of coupling beams, a greater share of the storey shear is undergone by the frame surrounding the steel plate. Thus, the steel plate has withstood less share of the lateral load and will require a smaller thickness. As the thickness of the steel plates decreases, story beams need to be sufficiently strong to resist the tension field. Moreover, when the span length of the shear walls increases (length of coupling beam is constant), the energy absorption capacity of the structure increases and drifts are reduced.

#### 4- Conclusion

This paper deals with the SSI effects on seismic behavior of the CSPSW systems in 5, 10 and 20-storey structures with coupling beam lengths of 1.25, 2.5 and 3.75m and span lengths of 2.4, 3.2 and 4.8m. accordingly, the structures were subjected to seven near and far-fault earthquakes and are assumed to be located on soil types II and IV.

As per increase in length of the coupling beam, when the length of the SPSW is constant, the drift and fundamental period of the structures increase, base shear and degree of coupling are reduced. Moreover, the length of the coupling beam majorly affects the ductility of the structure.

The use of the CSPSW illustrated that this system compared to the SPSW, is of greater stiffness and even following increase in span length of the SPSW while coupling beam is constant, base shear increases and drift are reduced.

Determination of the degree of coupling of the CSPSW considerably affects the design process of the structures. Energy absorption of the coupling beams that are yielded in shear is more appropriate because, in shear mode, the whole of their capacity is exploited. Moreover, the stiffness of the coupling beam markedly affects the fundamental period of structures and degree of coupling.

#### References

- [1] Beam in The Coupled Steel Plate Shear Wall”, Second National Conference on Structures and Steel, Iran, 2011
- [2] M. Gholhaki , M. Ghadaksaz, “Investigation Of The Link Saeed Sabouri, “Investigating of Behavior Coupled Beam Length Of A Coupled Steel Plate Shear Wall”, Steel And Composite Structure, January 2016
- [3] S. Sabouri-Ghomi, M. Gholhaki, “Experimental Study of Three-Study Ductile Steel plate shear wall”, Journal Amirkabir

#### HOW TO CITE THIS ARTICLE

E. Yourtchi, M. Gholhaki, O. Rezaifar, *A Study on Soil-Structure Interaction on Seismic Response of Coupled Steel Plate Shear Wall subjected to Near and Far-Field Earthquakes*, *Amirkabir J. Civil Eng.*, 53(12) (2022) 1103-1106.

DOI: 10.22060/ceej.2020.18696.6930



