



A new method for determining natural modes and their frequencies with the concept of node in vibrations of M-DOFs

A. A. Safavi

Engineering Department, Golestan University, Ali-Abad Katool, Golestan, Iran

ABSTRACT: This paper evaluates the vibration of M-DOF systems by calculating the natural frequencies and mode shapes. The introduced method is established on the base of the node concept, which is the point of a mode shape with zero displacement. In this method, a system with two or more degrees of freedom is transformed into two or more isolated systems with one- DOF. Those systems are isolated in node places and vibrate with the same frequencies in every mode. Each spring located between two adjacent lumped masses will be converted to series combination of two separated springs. The stiffness of the first spring is equal to the effective stiffness of the two series separated springs. The proposed method provides a good physical understanding about the concept of vibration modes. Besides, this method is accurate and sometimes is simpler and quicker than the common method.

Review History:

Received: Jun. 25, 2020

Revised: Mar. 31, 2021

Accepted: Apr. 03, 2021

Available Online: Apr. 23, 2021

Keywords:

Natural modes

Natural frequencies

Node

M-DOFs system

One- DOF systems

1- Introduction

Vibration modes and their frequencies are important subjects in the dynamic of structures and the relevant references [1]. Namjooyan et al. [2] obtained a new relation for the empirical period time of moment frames and evaluated the accuracy of the offered equations in Iranian Standard No. 2800 [3]. Ahmadi Danesh and Rafiee [4] evaluated the upper modes effects on the behavior of tall buildings. The studied buildings were 5, 12, 18, 30 and 50 story buildings. They realized that the upper modes are more effective on the upper and middle stories of fairly tall (12&18 story) and very tall (30&50 story) buildings, respectively. Do Hyun Kim and Ji Young Kim [5] by field measurement and FEM determined the natural frequencies of the three first modes of multi-story reinforced concrete buildings with various structural systems. They observed that the value of concrete elasticity modulus, the existence of non-structural members and flexural stiffness of slabs have effects on dynamic parameters. The Modified Energy Method was employed for the dynamic analysis of SDOF by Jalili Sadrabad et al. [6]. In this method, potential, dissipation and kinematic energy were defined in accordance with spring, dissipation and inertia forces. This approach was done by integrating two sides of the motion equation of SDOF, accordingly "dx" was written as "dx=v(t)dt". In this way, energy equations were converted into definite integrals in the time domain.

In the literature review [1, 7-9], the mass-spring model

of a shear-building structure must firstly be drawn for its vibration evaluation. Lumped masses and springs are equivalent of stories masses and shear stiffness between stories, respectively. By making mass and stiffness matrices and doing some mathematical operations, characteristic matrix and characteristic equation could be obtained. Frequencies of modes are the roots of the characteristic equation.

In almost all the researches, frequencies and relevant shape modes were calculated by Eigenvalues Problem and characteristic equation. Here, this problem is solved by a new and simple method and on the base of physical primary concepts of mass, spring and node of vibration. To enter the main text, present some concepts that is suitable:

Rigid mode: One of the vibration modes of unstable structures in which all the masses have similar movements.

Series and Parallel springs: Two or more springs are said to be in series when they are connected end-to-end or point to point and it is said to be in parallel when they are connected side-by-side.

Node: In mode shapes, point(s) of the system which has (have) no movement is (are) node(s) of vibration.

2- Methodology

2- 1- Shape modes and frequencies in 2-DOF Unstable systems

This system has no support, thus is unstable and has rigid mode (Figure 1).

*Corresponding author's email: aasafavy@yahoo.com





Fig. 1. Dividing the primary spring (left) into two adjusted series springs (K_1 & K_2) from the node location (right)

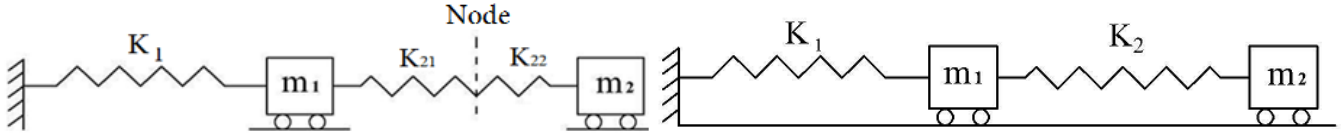


Fig. 2. A 2-DOF stable system that has a support (left), assuming node location and dividing the primary spring into K_{21} and K_{22} (right)

2- 1- 1- Rigid mode

In this mode the spring has no deformation consequently, its mode shape is $\phi_1 = \begin{Bmatrix} 1 \\ 1 \end{Bmatrix}$ and the relevant frequency is equal to zero, $\omega_1 = 0$.

2- 1- 2- non-rigid mode

According to the node concept, a point is considered between two masses. In this mode, the movements of masses are against each other, therefore, the shape mode can be written as $\phi_2 = \begin{Bmatrix} \phi_2 \\ \phi_2 \end{Bmatrix}$.

A support can be imagined in the location of the node, accordingly each of the masses is connected to a rigid support via separated springs, " K_1 " and " K_2 " (Figure 1). Thus the frequency of the second mode will be equal to:

$$\omega_2 = \sqrt{\frac{K_1}{m_1}} = \sqrt{\frac{K_2}{m_2}} \quad (1)$$

Besides, the first spring (K) is the equivalent spring of series springs, K_1 and K_2 , i.e. $K = \frac{K_1 K_2}{K_1 + K_2}$. Therefore K_1 , K_2 and the second mode frequency can be calculated. In every moment of the free vibration, the axial forces in the separated springs are the same ($F_1 = F_2 = |K_1 \phi_2| = |K_2 \phi_2|$). Concerning Eq. 1, the second shape mode, modal matrix and non-rigid (second) mode frequency will be obtained:

$$\frac{\phi_{12}}{\phi_{22}} = -\frac{K_2}{K_1} = -\frac{m_2}{m_1} \Rightarrow \phi_2 = \begin{Bmatrix} 1 \\ \phi_{22} \\ \phi_{12} \end{Bmatrix} = \begin{Bmatrix} 1 \\ -\frac{m_1}{m_2} \\ \phi_{22} \end{Bmatrix} \quad (2)$$

$$\Phi = \begin{bmatrix} 1 & 1 \\ 1 & -\frac{m_1}{m_2} \end{bmatrix}, \omega_2 = \sqrt{\frac{K_1}{m_1}} = \sqrt{K \frac{m_1 + m_2}{m_1 m_2}}$$

2- 2- Shape modes and frequencies in 2-DOF Unstable systems

2- 2- 1- Stable systems which have a support

This system is not unstable; thus, rigid mode will not form. A suitable location must be assumed as a node to determine the shape modes and corresponding frequencies. Between the masses is that location (Figure 2). According to Figure 2, the primary spring is the equivalent spring of the two new springs, i.e. $K_2 = \frac{K_1 K_2}{K_1 + K_2}$. The frequencies of the two modes satisfy the next equation:

$$\omega_i = \sqrt{\frac{K_{e1}}{m_1}} = \sqrt{\frac{K_{e2}}{m_2}} \quad (3)$$

where

$$K_{e1} = K_1 + K_2 \quad K_{e2} = K_2$$

By solving the last equations simultaneously:

$$K_{21}^2 + (K_1 - K_2 - \frac{m_1}{m_2} K_2) K_{21} - K_1 K_2 = 0 \quad (4)$$

Top equation has two roots for " K_{21} ", each of them must be used for a mode. Then the value of " K_{22} " will be obtained. Therefore shape modes and frequencies can be determined. Other systems with upper DOFs are evaluated in the main text.

3- Results and Discussion

Example:

The frequencies of the second mode of unstable (Figure 1) and stable systems (Figure 2) with the below characteristics are requested: unstable system: $m_1=1$ kg, $m_2=2$ kg, $K=1000$ N/m. stable system: $m_1=1$ kg, $m_2=2$ kg, $K_1=1000$ N/m, $K_2=2000$ N/m.

Solution with the proposed method:

Unstable system:

$$\omega_2 = \sqrt{\frac{K_1}{m_1}} = \sqrt{K \frac{m_1 + m_2}{m_1 m_2}} = \sqrt{1000 \times \frac{1+2}{1 \times 2}} = 10\sqrt{15}$$

$$\approx 38.7 \text{ rad/s}$$

Stable system:

$$\text{Eq. (4): } K_{21}^2 - 2000K_{21} - 2000000 = 0 \Rightarrow K_{21} = 1000(1 \pm \sqrt{3}),$$

$$\text{Eq. (3): } \omega_1 = \sqrt{\frac{K_{e1}}{m_1}} = \dots = \sqrt{\frac{K_1 + K_{21}}{m_1}} \Rightarrow \omega_2 = \sqrt{\frac{1000 + 1000(1 + \sqrt{3})}{1}}$$

$$\approx 61.1 \text{ rad/s}$$

The solution process shows that the application of the introduced method is very simple and fast and the results are exact.

4- Conclusion

In this paper, frequencies and mode shapes of dynamic systems are calculated on the base of the node concept in vibration. Node is a point of a mode shape with zero displacement. The application of the proposed method is very simple and does not need complex physical and mathematical operations. The method is not approximate; thus, the results are exact.

References

- [1] R. W. Clough and J. Penzin (2003), "Dynamics of Structures". 2nd ed., CSI Computers & Structures, Berkeley, Calif., USA.
- [2] M.A. Namjooyan, M.R. Karimian, H. Borsalani and R. Rahgozar (2014), "A New Equation for Estimating the Experimental Period of Steel Moment Frames". 5th National Conference on Earthquake and Structures, Kerman, Iran (in Persian).
- [3] Permanent Committee for Revising the Iranian Code of Practice for Seismic Resistant Design of Buildings (2014), "Iranian Code of Practice for Seismic Resistant Design of Buildings, Standard No. 2800", 4th ed., Road, Housing and Urban Development Research Center, Tehran, Iran (in Persian).
- [4] F. Ahmadi Danesh and E. Rafiee (2015), "Effects of Upper Modes on the Seismic Behavior of Tall Buildings". International Conference on Architectural, Civil and Urban in Millennium, Association of Iranian Architectures, Tehran, Iran (in Persian).
- [5] Do Hyun Kim and Ji Young Kim (2014), "Assessment on Natural Frequencies of Structures using Field Measurement and FE Analysis". International Journal of High-Rise Building, Vol. 3, No. 4, pp. 305-310.
- [6] M. Jalili Sadr Abad, M. Mahmoudi and E. H. Dowell (2017), "Dynamic Analysis of SDOF Systems Using Modified Energy Method". ASIAN JOURNAL OF CIVIL ENGINEERING (BHRC), Vol. 18, No. 7, pp. 1125-1146.
- [7] M. Paz and W. Leigh (2005), "Structural Dynamic: Theory and Computation". Kluwer Academic Publishers, 5th Ed., USA.
- [8] Anil K. Chopra (2012), "Dynamics of Structures: Theory and Applications to Earthquake Engineering". PRENTICE-HALL, 4th Ed. USA.
- [9] K. Bargi (2018), "Dynamic of Structures". 2nd ed., University of Tehran Pub., Tehran, Iran (in Persian).

HOW TO CITE THIS ARTICLE

A. A. Safavi, A new method for determining natural modes and their frequencies with the concept of node in vibrations of M-DOFs, Amirkabir J. Civil Eng., 54(1) (2022) 51-54.

DOI: 10.22060/ceej.2021.18638.6913



